

TRIDON Product Overview





CN

↔ 9mm
ø 12-200mm
DIN3017-1
W1, W2, W4, W5



CNS

↔ 12mm
ø 12-200mm
DIN3017-1
W1, W2, W4, W5




NP

↔ 9mm
ø 12-200mm
DIN3017-1
W2, W3, W4, W5



NP

↔ 12mm
ø 12-200mm
DIN3017-1
W2, W3, W4, W5



NP with Bridge

Left or Right Hand
Multiple Bridges Available
on Request.



Micro Gear

↔ 8mm
ø 16-89mm
SAE (Perforated Band)
300SS

Other Materials Available.



Hy-Gear

↔ 12mm - 1/2"
ø 12-178mm
SAE (Perforated Band)
300SS

Other Materials Available.



Hy-Gear

↔ 14mm - 9/16"
ø 20-222mm
SAE (Perforated Band)
300SS

Lined Versions Available.



Power Gear

↔ 16mm - 5/8"
ø 25-232mm
SAE (Perforated Band)
300SS



Power Gear - Lined

↔ 16mm - 5/8"
ø 25-232mm
SAE (Perforated Band)
300SS



T-Bolt

↔ 19mm - 3/4"
ø 41-211mm
with Bridge
300SS



T-Bolt - Spring Loaded

↔ 19mm - 3/4"
ø 57-141mm
with Bridge
300SS
Carbon steel bolt



TPC

↔ 16, 20, 25, 30mm
ø 23-252mm
DIN3017-3
W2, W4, W5



TPC-S

↔ 24mm
ø 122-252mm
M8/M10 Bolt & Barrel
W4, W5



TPCN

↔ 22-24mm
ø 36-252mm
M8/M10 Bolt & Barrel
W2



Bi-Blok

↔ 30mm
ø 74-500mm
2x M10 Bolt & Barrel
W1



V Clamp

Made to Order




Quick Connect V Clamp

Made to Order



Univee Clamps

Made to Order



Pressed V Clamp

Made to Order



VN

↔ 9mm
ø 27-750mm
DIN3017-1
W2, W4



VNS

↔ 12mm
ø 44-750mm
DIN3017-1
W1, W2



Surelock

↔ 14mm
ø 13-565mm
SAE (Perforated Band)
304SS, 316SS



Snap Lock

↔ 14mm
ø 13-540mm
SAE (Perforated Band)
201SS, 410SS



MAR Exhaust Clamp

M8, M10
ø 35-125mm
U-Bolt type
Steel, Zinc Plated

**Smart Seal**

↔ 12mm - 1/2"
 ø 28-125mm
 with liner
 300SS 410SS screw

**Wave Seal**

↔ 14mm - 9/16"
 ø 26-173mm
 with liner
 300SS 410SS screw

**NP - SA**

↔ 9mm
 ø 16-140mm
 Spring assist
 W3, W4

**NP - SA**

↔ 12mm
 ø 16-140mm
 Spring assist
 W3, W4

**Flex Gear LD**

↔ 14mm - 9/16"
 ø 13-89mm
 Perforated band
 300SS, 410SS
 or carbon screw

**Flex Gear HD**

↔ 16mm - 5/8"
 ø 25-232mm
 Perforated Band
 300SS, 410SS
 or Carbon Screw

**Ear Clip - Single**

↔ 6-7.5mm Band
 ø 7-18mm
 W1, W4

**Ear Clip - Double**

↔ 6-10mm Band
 ø 5-40mm
 W1, W4

**Ear Clip - Lined**

↔ 6-7.5mm Band
 ø 7.5-19.3mm
 W1, W4

**CAW - Ear Clip**

↔ 5-7mm Band
 ø 7-18, 5mm
 W4

Other Sizes on Request.

**DCL**

↔ 8mm
 ø 8-25.5mm
 Colour Coded
 W4

Other Sizes on Request.

**Ear Clamp Tool****Pneumatic Tool**

for Ear Clamps

**BIFM**

0.8-3.5mm wire
 ø 5-61mm
 Spring Wire
 W1

**CTS**

↔ 7,8mm
 ø 5.9-21.3mm
 Spring Steel
 W1

**BIFV**

↔ 1.5-3mm Wire
 ø 9-175mm
 W1

**BEN**

↔ 9mm
 ø 7-25mm
 W1

**Heavy Bolt Clamp**

↔ 25-30mm
 ø 37-120mm
 W1

**Ezyclick**

ø 9-46mm
 Colour: Black
 PA6.6

**Herbie**

ø 5.6-169mm
 Colour: Black
 PA6.6

**Fast Clamp Kit**

↔ 9mm
 3m Band & 8 Housings
 W2-W4

**Fast Clamp Kit**

↔ 14 mm
 3m band & 8 Housings
 Blister or Casette
 W2-W4

**Fast Clamp Band**

↔ 9mm
 W2-W4

**Fast Clamp Housing**

↔ 9mm
 W2-W4

**Fast Clamp Band/Housing**

↔ 14mm
 W2-W4



Banding

↔ 6, 10, 12, 16, 19mm
L= 30m
201SS, 304SS, 316SS



Heavy Duty Banding

↔ 19, 25, 32mm
L=30m
201SS, 304SS, 316SS



Buckle

↔ 6, 10, 12, 16, 19mm
W4, W5
304SS, 316SS




Heavy Duty Buckle

↔ 19, 25, 32mm
W4, W5
304SS, 316SS



Wing Seal

↔ 12, 16, 19mm
W4, W5
304SS, 316SS



Crimp Seal

↔ 12, 19mm
W4
304SS



Screwbinder Buckle

↔ 12, 19mm
201SS



J Clamp

↔ 10, 12, 16, 19mm
ø 12-200mm
201SS




Pow'r Tight Clamp

↔ 19mm
ø 12-200mm
201SS



Free End Clamp

↔ 6.5mm
L=250-1250mm
Supplied Straight
W4



Sign Holder

M8 Straight or Flared
W4



Electrical Tool Set



Electrical Tool Set

Bench Mount Kit



Electrical Tool Set

Band & Buckle



Battery & Charger



**Band & Buckle
Attachment**

for Electrical Tool Set



**J-Hose Clamp
Attachment**

for Electrical Tool Set



Spin Tight Tool

up to 3/4" Band



Spin Tight Tool

for 3/4"-1 1/4" Band



J Clamp Adaptor



Clamp Center

on Request.



Assortment Box

on Request.



Contractor Packs

on Request.



**Poly Bags
2, 5, 10 Pieces**

on Request.



Blister Packs

on Request.



TPK DIN3016

↔ 12, 15, 20, 25mm
 ø 5-200mm
 EPDM Liner
 W1, W3, W4, W5



Nylon Tie

↔ 2.2-12.5mm
 L=75-1000mm
 Black or White
 PA6.6



NYL5401

↔ up to 4.8mm



NYL5405

↔ 3.5-12.5mm




Cinturing Nylon Tie

↔ 9mm
 L=200-760mm
 Black
 PA6.6



Cush-a-Clamp

Insulated Strut Clamp
 ø 6-160mm
 -45-135°C
 Zinc Plated or SS304



Cush-a-Nator

Insulated Strut Clamp
 ø 6-160mm
 -45-135°C
 Zinc Plated or SS304



Cush-a-Nator HT

High Temperature
 ø 6-160mm
 -53-170°C
 Zinc Plated or SS304



Alpha

Insulated U-Bolt
 ø 21-324mm
 Standard & High Temp.
 Zinc Plated or SS304



Omega

Insulated Strap Clamp
 6-168mm
 Standard & High Temp.
 Zinc Plated or SS304



**Klo-Shure
Clamps 8 Series**

ø 6mm-DN100
 For Use with Elastomeric
 Foam Insulation




**Klo-Shure
Clamps 8 Series**

ø 6mm-DN50
 For Use with Elastomeric
 Foam Insulation




**Bronco
Saddle Support**

ø 50-220mm External
 For Use with Elastomeric
 Foam Insulation



Strut Channel

on Request.



Strut Fittings

on Request.



**DIN3015
Beta Standard**

ø 6-102mm
 PP, PA, SA & Aluminium
 W1, W4, W5



**DIN3015
Beta Twin**

ø 6-42mm
 W1, W4, W5



**DIN3015
Beta Heavy**

ø 6-450mm
 W1, W4, W5



**DIN3015
Beta Smooth**

ø 6-102mm
 W1, W4, W5



**DIN3015
Beta Smooth Twin**

ø 6-42mm
 W1, W4, W5



Cush-a-Bloc

267x127x106mm
 LxWxH



**Cush-a-Bloc
& Strut**

41x21mm Strut



**Cush-a-Bloc
Bridge**

2 Blocks with
 Strut on Request



**Cush-a-Bloc
Mini**

168x127x102mm
 LxWxH



**Cush-a-Bloc
Mini & Strut**


41x21mm Strut

Product Details and Ordering Information:

Material		DIN	AISI	BS
W1	Steel, Zinc Plated			
W2	Band & Housing	1.4016	430	430 S 17
	Screw	Steel, Zinc Plated		
W3		1.4016	430	430 S 17
W4		1.4301	304	305 S 15
W5		1.4401	316	316 S 31

Explanation of Symbols

↔	Strap Width / Suitable For
∅	Clamping Range / Diameter
L	Length

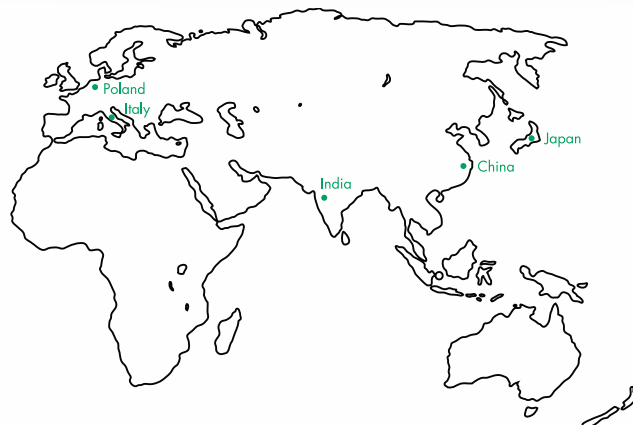

Products displayed in this flyer are RoHS compliant.
For detailed information please contact us.

Tridon Clamp Products Sp. z o.o.
ul. Nad Potokiem 15A
57-350 Kudowa Zdroj / Poland
T: +48.74.8735200 F: +48.74.8841017
tridoneurope.com

